



Transformer



M0000000


Catalog Number **9T83B3882G62** Type **QL-WP**

30.0 KVA 60 HZ 3 PH 6.2 % IMP


40 C AMB. 150 C RISE 220 C SYSTEM IS-19C

Note: Design is based on 30.00KVA & 150C Rise 6.2% Imp.

PRIMARY (H) 480 VOLTS (LINE-LINE)
SECONDARY (X) 240 VOLTS (LINE-LINE)

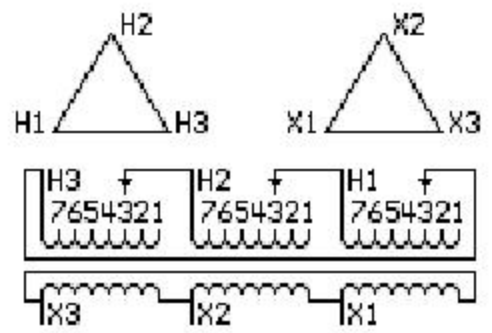

COIL TAP ARRANGEMENT

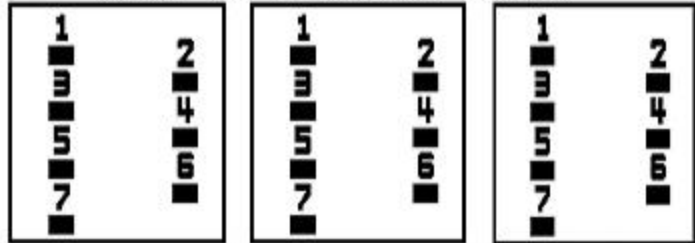

JUMPER CONNECTION	
TAP	VOLTS
1	502
2	491
3	480
4	467
5	456
6	444
7	433

NET WGT
 334 LB
 151.5 Kg
 9T83B3882
 27328
 KU372
 NOG
 013013

INSPECTION
&
FINAL TEST
N305!



LISTED 769G

Assembled in Mexico

ENCLOSURE TYPE 3R (IP32)

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001 Outline: 303B401AAP072
 ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.


X3 - X2 - X1 - -
 - H3 - H2 - H1

Note: Standard

X3 - X2 - X1 - -
 - H3 - H2 - H1
 X3 - X2 - X1 - -
 - H3 - H2 - H1



M0000000

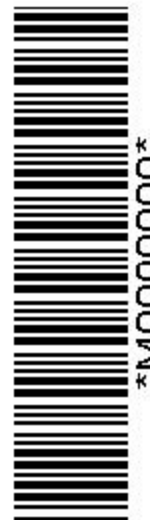

M0000000