



# Transformer



\*1M000000\*


Catalog Number  
**9T83B4008G29**

Type **QL**

**93.0 KVA 60 HZ 3 PH 5 % IMP**

40 C AMB. 150 C RISE 220 C SYSTEM IS-19C

PRIMARY (H) 230 VOLTS (LINE-LINE)  
SECONDARY (X) 230 VOLTS (LINE-LINE)  
133 VOLTS (LINE-NEUTRAL)

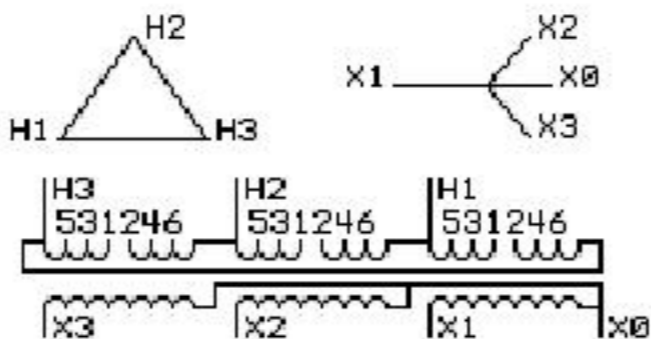

JUMPER CONNECTION TAP VOLTS


1-2	241
3-4	230
5-6	216

NET WGT  
765 LB  
347.0 Kg

55113  
XV375  
NOG  
072115

INSPECTION & FINAL TEST  
N530!

### COIL TAP ARRANGEMENT

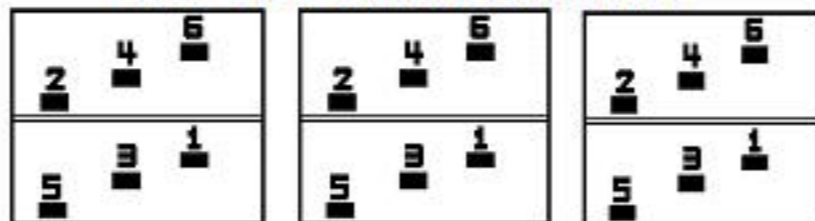

ENCLOSURE TYPE 2 (IP30). RAINPROOF TYPE 3R ENCLOSURE (IP32) WHEN PROVIDED SHIELD 9T18Y4317G06

Assembled in Mexico

BEFORE HANDLING, INSTALLING AND OPERATING, SEE INSTRUCTION 475A667AAP001  
ALUMINUM CONDUCTOR PRIMARY: 10 KV BIL SECONDARY: 10 KV BIL

Outline: 303B401AAP075

IN ACCORDANCE WITH NEC SECTION 450-9, ALLOW AT LEAST SIX INCHES CLEARANCE FOR VENTILATION. CHECK ADDITIONAL NEC AND LOCAL CODES.

X3 - X2 - X1 - -  
- H3 - H2 - H1

Note: X0 Terminal at the bottom

X1 - -  
X2 - - H1  
H3 - H2 - H1  
X3 - X2 - X1 -  
H3 - H2 - H1  
X0

